




CONNECTIONS

- Discharge: 3/4" or 1"
- Inlet: 2"
- Vent: 1-1/2"
- Easy-access to pressure chamber/electrical parts for easy service/replacement.

PRODUCT FEATURES

- Install a complete bathroom up to 25 feet below the sewer line, or even up to 150 feet away.
- Stainless steel grinder system for both residential and commercial applications.
- Handle sanitary products that may have been flushed down the toilet; sanitary napkins, q-tips, dental floss, etc.

PUMP CURVE

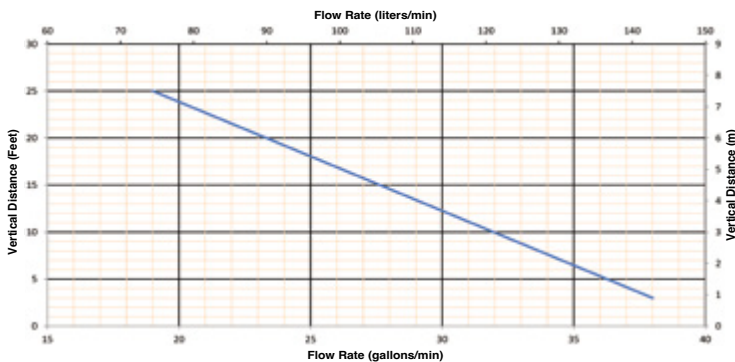

OPTIONAL ACCESSORIES

Sanialarm
(Part N° 050)
See page 28



Descaler
(Part N° 052)
See page 28



Extension Pipe
(Part N° 030)
See page 28



TECHNICAL SPECIFICATIONS

Pump type: Grinder

Electrical: 120 V - 60 Hz / 9 Amps (Max)

Motor: 1 HP oil-filled thermally protected motor

Capacitor rating: 60 microfarad

Operating Temperature: 104°F (110°F Max.)

Power cord length: 49 inches

Noise level: ≤ 63 dBA (Lp) (measured at 3 ft.)

Discharge pipe diameter: 3/4" or 1"

Discharge rate at 25 ft: 19 GPM

Discharge rate at 3 ft: 38 GPM

Shut-off head: 38 ft.

Normal running time: 10-12 seconds

Capacity: 3.2 gallons / 12.1 liters

Inlets: 2" (side), 1-1/2" vent (top)

Method of activation: Membrane/microswitch

Shower/bathtub base height: 8" min

Weight: 28 lbs / 12.7 kg

Certifying agencies: CSA (IPC, NSPC), IAPMO (UPC)

Connections: Saniflo's rear outlet toilet, sink, shower/bathtub, washing machine (indirect connection via laundry sink)

DIMENSIONAL DRAWINGS

