



## CONNECTIONS


- Discharge: 1"
- Inlet: 1-1/4"

Designed with an internal one-way vent built which eliminates the need to have an external vent pipe

## PRODUCT FEATURES

- Install a half bathroom up to 9 feet below the sewer line, or even up to 120 feet away.
- Self-contained macerating system for residential applications.
- The blade is made out of a hardened stainless steel material which eliminates the need for any service or replacement.

## PUMP CURVE

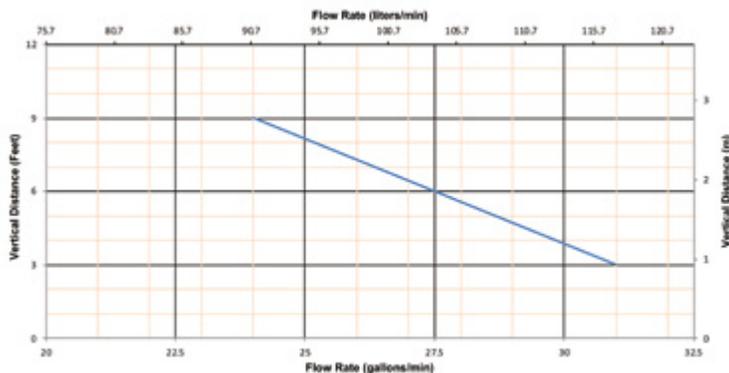

## OPTIONAL ACCESSORIES

**Descaler**  
(Part N° 052)  
See page 28



## TECHNICAL SPECIFICATIONS

**Pump type:** Macerator

**Electrical:** 120 V - 60 Hz / 7.2 Amps (Max)

**Motor:** 0.5 HP oil-filled thermally protected motor

**Capacitor rating:** 45 microfarad

**Operating Temperature:** 95°F (110°F Max.)

**Power cord length:** 59 inches

**Noise level:** ≤ 53 dBA (Lp) (measured at 3 ft.)

**Discharge pipe diameter:** 1"

**Discharge rate at 9 ft:** 24 GPM

**Discharge rate at 3 ft:** 31 GPM

**Normal running time:** 24 sec (18 sec ECO mode)

**Capacity:** 0.8 gallons / 3.02 liters

**Inlets:** 1-1/4" sink connection (on motor case)

**Method of activation:** Push button / circuit board

**Weight:** 64 lbs / 29 kg (Bowl with motor)

**Certifying agencies:** CSA (IPC, NSPC)

**Connections:** Sink

## DIMENSIONAL DRAWINGS

